

Bronze Gate Valve

Model: SD-GGV20/W

The SD-GGV20/W gate valve is manufactured to BS 5154 which can be used for heating plants, sanitary systems, plumbing services, waterworks, pneumatic systems and steam.



Product Specifications:

Working Pressure	PN20
Working Temperature	-10°C - 170°C
Thread	BS 21 (B.S.P.T.)
Approvals/Listings	WRAS <small>Water Regulations Advisory Scheme</small>

Bronze Gate Valve

Product Dimensions:


Bronze Gate Valve NRS

DN	ØD	H	L	d
15	52	78	43	13
20	60	88	49	19
25	65	103	54	25
32	70	116	62	32
40	78	133	65	38
50	92	156	75	50

NOTE: Dimensions are in mm

Drawing Specification

No.	Part	Material
1	Hand-Wheel Nut	Brass
2	Name Plate	Aluminium
3	Hand-Wheel	Aluminium
4	Stem	DZR Brass
5	Packing Nut	Brass
6	Ring	Brass
7	Packing	PTFE
8	Stem Bush	DZR Brass
9	Bonnet	Bronze
10	Disc	Bronze
11	Body	Bronze

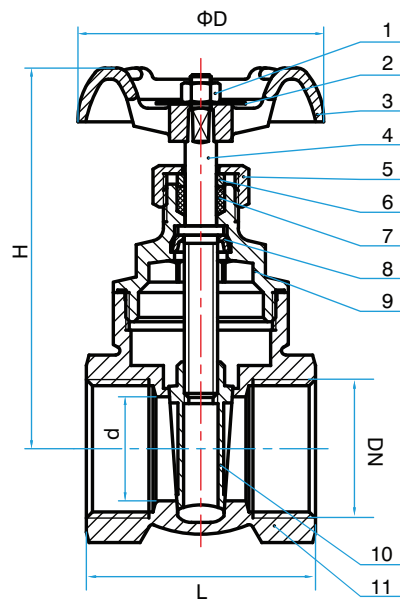

Bronze Gate Valve

Miscellaneous Data:

1. Ordering Information

Example: SD-GGV20/W-20

- SD-GGV20/W is the part number
- (20) Size

2. Contact Information

For further information on any aspect of the SHIELD Valves products please contact below:

MIDDLE EAST & AFRICA	UNITED KINGDOM
Jebel Ali Free Zone, Dubai, UAE P.O Box: 61199 Tel.: +971 4 881 2070 Fax: +971 4 881 2198 Email: shieldme@shielglobal.com	Unit 3, Endeavor Drive, Basildon-Essex, SS3 14WF Tel.: +44 1708 377731 Fax: +44 1708347637 Email: shielduk@shielglobal.com