

BS FLANGED RESILIENT NRS GATE VALVE

MODEL: SD-NRS200FF-PN16


- Working pressure: 200 PSI
- Valve available with handwheel or with post indicator flange (without handwheel)
- Connection ends: Flange to BS EN 1092-2:1997
- Temperature range: 0°C to 80°C
- Coating: Fusion bonded epoxy coating internally and externally in accordance with ANSI/AWWA C550



PART NO.	PART NAME	ASTM SPEC.
1	Valve Body	EN-GJS-450-10
2	Resilient Vedge Disc	EN-GJS-450-10 + EPDM
3	Stem	SS420
4	Nut	SS 316
5	Bonnet	EN-GJS-450-10
6	O Ring	NBR
7	Gland	EN-GJS-450-10
8	Handwheel	EN-GJS-450-10

9	Bolt	SS 316
10	Flat Washer	SS 316
11	Ring Wiper	NBR
12	Bolt	SS 316
13	Flat Washer	SS 316
14	O Ring	NBR
15	Thrust Washer	Brass
16	Bonnet Gasket	EPDM
17	Wedge Nut	Brass

* Optional for Stem SS316,SS304

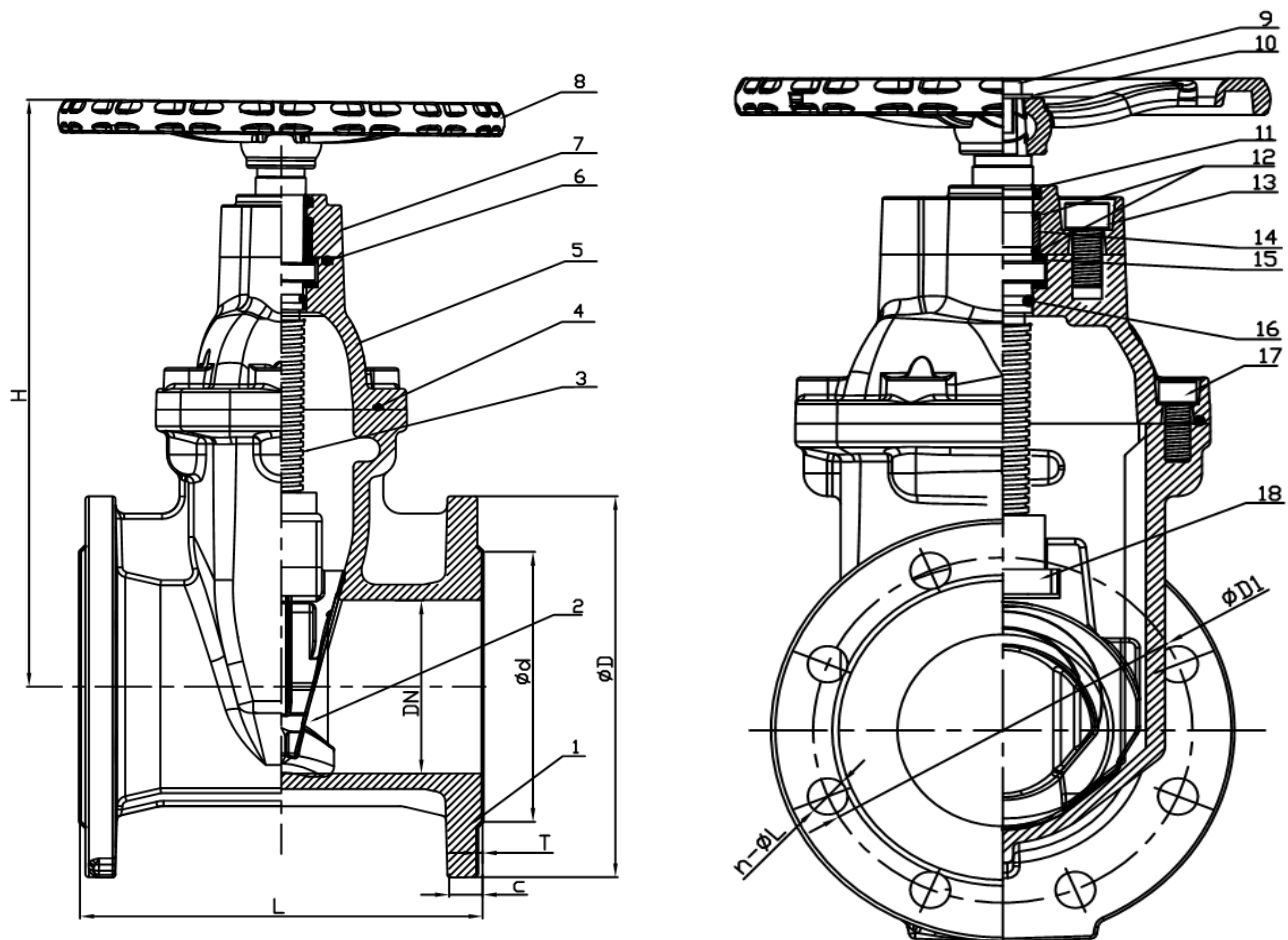

Size	L	H	D	D1	d	C	T	n x d
2.5"	190	232	185	145	118	19	3	4x19
3"	203	289	200	160	132	19	3	8x19
4"	229	327	220	180	156	19	3	8x19
5"	254	393	250	210	184	19	3	8x19
6"	267	432	285	240	211	19	3	8x23
8"	292	490	340	295	266	20	3	12x23
10"	330	634	405	355	319	22	3	12x28
12"	356	727	460	410	370	24.5	4	12x28

Unit : mm