

BS FLANGED RESILIENT NRS GATE VALVE


MODEL: SD-NRS250FF-PN16

- Working pressure: 250 PSI
- Valve available with handwheel or with post indicator flange (without handwheel)
- Connection ends: Flange to BS EN 1092-2:1997
- Temperature range: 0°C to 80°C
- Coating: Fusion bonded epoxy coating internally and externally in accordance with ANSI/AWWA C550



PART NO.	PART NAME	ASTM SPEC.
1	Valve Body	EN-GJS-450-10
2	Resilient Vedge Disc	EN-GJS-450-10 + EPDM
3	Stem	SS420
4	Nut	Carbon Steel Zinc Plated
5	Bonnet	EN-GJS-450-10
6	O Ring	NBR
7	Gland	EN-GJS-450-10
8	Handwheel	EN-GJS-450-10
9	Bolt	Carbon Steel Zinc Plated
10	Flat Washer	Carbon Steel Zinc Plated
11	Ring Wiper	NBR
12	Bolt	Carbon Steel Zinc Plated
13	Flat Washer	Carbon Steel Zinc Plated
14	O Ring	NBR
15	Thrust Washer	Brass HPb59-1
16	Bonnet Gasket	EPDM
17	Wedge Nut	Brass HPb59-1

* Optional for Stem SS316,SS304

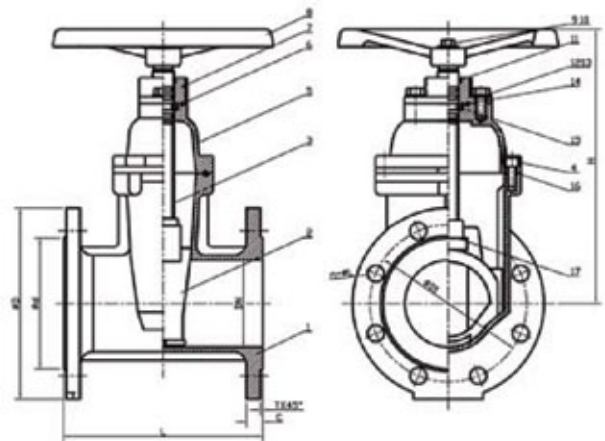

Size	L	H	D	D1	d	C	T	n x d
10"	330	626	405	355	319	22	3	12x28
12"	356	722	460	410	370	24.5	4	12x28

Unit : mm