

DOUBLE DOOR WAFER CHECK VALVE



MODEL: SD-DDNRV300, SD-DDNRV250, SD-DDNRV200
SD-DDNRV-PN16, SD-DDNRV-PN10



- Working Pressure: 300PSI
(200PSI and 250PSI available upon request)
- Connection Ends: ASME B16.1 Class 125
- Temperature: 0°C – 100°C
- Coating: Fusion Bonded Epoxy coating In accordance with ANSI/AWWA C550

Part No.	Part Name	ASTM SPEC.
1	Valve body	ASTM A536, 65-45-12
2	Disc	AISI 316
3	Stem	AISI 420
4	Spring	AISI 304
5	Rubber seat	EPDM

Note: For special material request other than standard specification, please indicate clearly on the inquiry or order list.

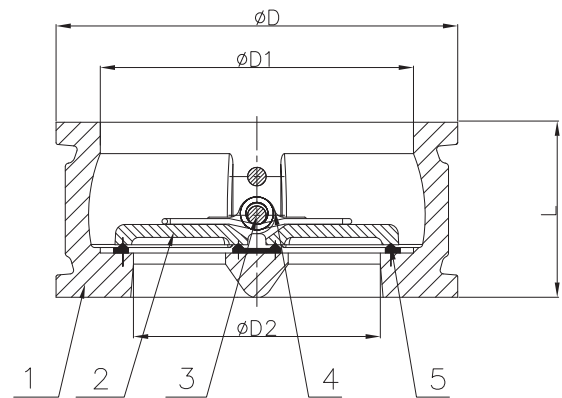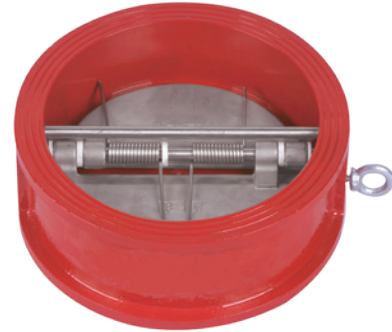

SIZE	L	D	D1	D2
2"	54	106	68	46
2.5"	60	127	78	60
3"	57	134	102	70
4"	67	162	117	84
5"	83	194	145	115
6"	95	218	170	134
8"	127	277	226	184
10"	140	336	265	220
12"	181	406	310	260
14"	184	447	360	302
16"	194	505	410	350

Unit : mm

US GPM

