


SWING CHECK VALVE

MODEL: SD-NRV250CV

- Working Pressure 250 psi. Cold water pressure (Max. temp. 63°C)
- Flanged Ends to ANSI B16.1 Class 125
- Ductile Iron Body with EPDM
- Epoxy coated interior / exterior to AWWA C550
- Dual Plate Construction

PART NAME	MATERIAL	ASTM SPEC.
Body	Ductile Iron	ASTM A536, 65-45-12
Body Seal	EPDM	
Plate	Stainless Steel	ASTM A351.CF8
Spring	Stainless Steel	AISI 316
Hinge Pin	Stainless Steel	AISI 316
Washer	Teflon	
Thrust Washer	Teflon	
Plug	Mild Steel	A105-80
Square Plug	Mild Steel	A105-80
Packing	Buna"N"	

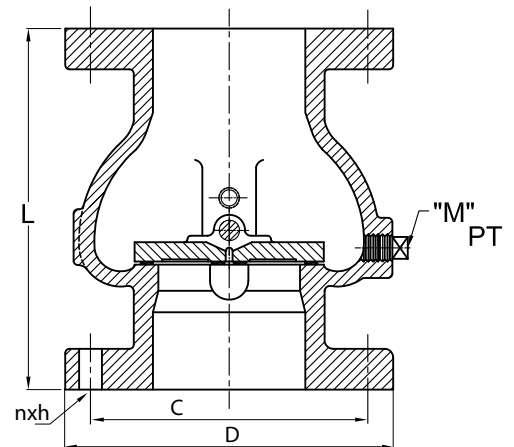

Size	L	C	D	"M"PT	n x h	Net. Wt. Lbs.
3"	168	152	191	12.7	4 x19.1	23.2
4"	190	191	229	12.7	8 x19.1	36.7
6"	229	241	279	19.1	8 x 22.2	62.9
8"	267	298	343	19.1	8 x 22.2	101.6

Unit : mm