


SWING CHECK VALVE



MODEL: SD-NRV300GG-D

- Working pressure: 300 psi
- Connection ends: Groove to AWWA C606
- Temperature range: 0°C to 80°C
- Coating: Fusion Bonded Epoxy Coating in accordance with ANSI/AWWA C550 or painting upon request

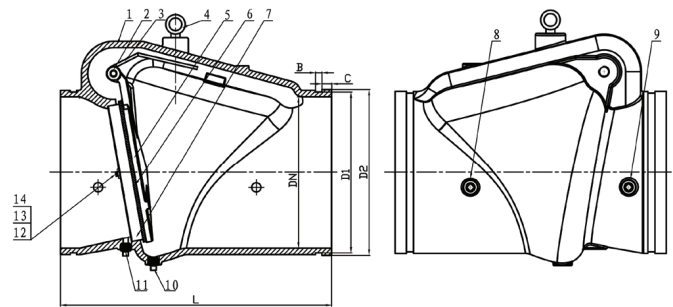

PART NO.	PART NAME	ASTM SPEC.
1	Valve Body	ASTM A536, 65-45-12
2	Hinge Pin	AISI 420
3	Spring	AISI 304
4	Eye Bolt	Carbon Steel Zinc Plated
5	Disc	DN50-100 AISI 304 DN150-300 ASTM A536, 65-45-12
6	Disc Sealing Ring	EPDM
7	Seat Ring	ASTM B62 C83600
8	Plug	Malleable Iron Galvanized
9	Plug	Malleable Iron Galvanized
10	Plug	Malleable Iron Galvanized
11	Plug	Malleable Iron Galvanized
12	Bolt	AISI 304
13	Washer	AISI 304
14	Nut	AISI 304

Size	L	D1	D2	b	c
2"	171	57.15	60.3	7.93	15.88
2.5"	184	69.09	73	7.93	15.88
3"	197	84.94	88.9	7.93	15.88
4"	206	110.08	114.3	9.53	15.88
5"	248	137.03	141.3	9.53	15.88
6"	324	163.96	168.3	9.53	15.88
8"	371	214.4	219.1	11.13	19.05
10"	457	268.28	273	12.7	19.05
12"	535	318.29	323.9	12.7	19.05

Unit : mm