



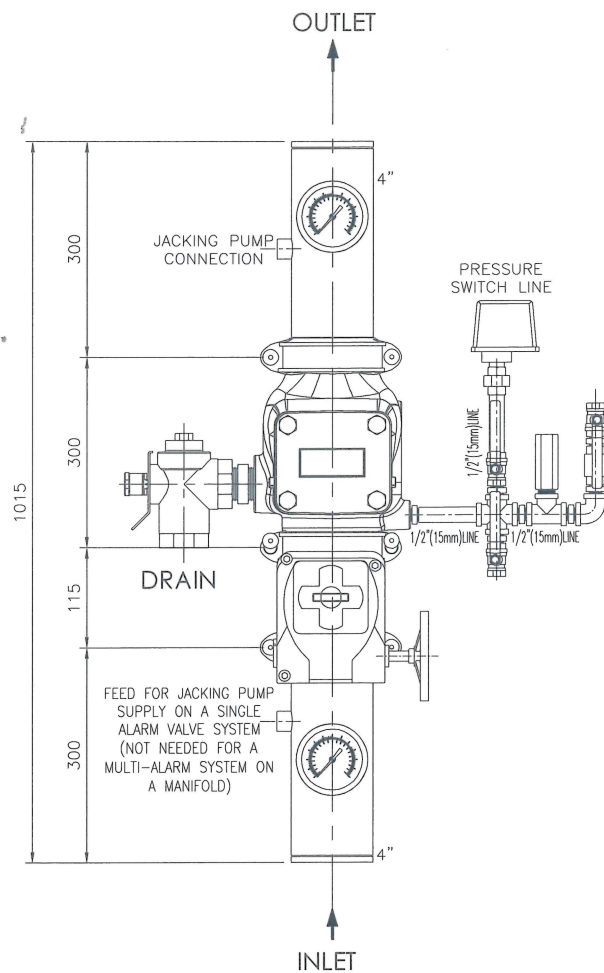

ALARM VALVE	
MODEL	SDH-AVA
MAX.WORKING PRESSURE	17.5 BAR
THREADED OPENING	BSPT
MOUNTING	VERTICAL
TRIM	GALVANIZED TRIM WITH BRASS VALVES
FACTORY HYDROSTATIC TEST PRESSURE	35 Kg/cm ² (500 PSI)
FINISH	RED RAL 3000

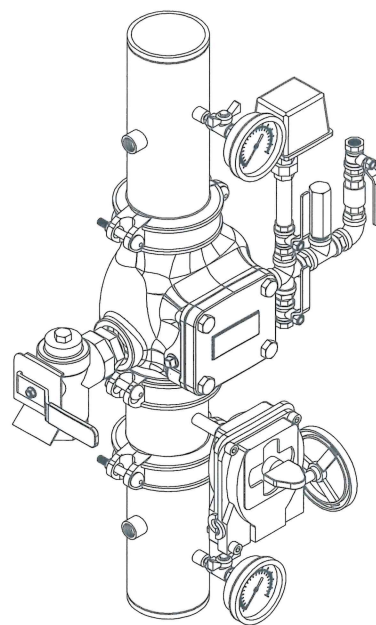

NOTE:- ALL DIMENSIONS ARE IN mm UNLESS OTHERWISE SPECIFIED

SHIELD
TRUSTED WORLDWIDE

FIRE, SAFETY AND SECURITY LTD
Email: info@shieldglobal.com, www.shieldglobal.com



TITLE

ALARM VALVE ASSEMBLY DRAWING
VALVE SIZE- 4"

1	ISSUE NO.	DETAILS OF REVISIONS	REV. NO.	DATE	REVIEWED BY
1		PRESSURE GAUGE ORIENTATION REVISED	1		
REVISION DETAILS					

DRAWN	CHECKED BY	APPD. BY	DATE	SCALE	DRG. NO.	REV.	SHEET
AGP	JSS	A.CHAMY	19-09-22	NTS	SD/AVAD/AVH/4IN/22	1	1 OF 1