


FIRE HOSE REEL WITH SEMI-RIGID HOSE (AS/NZS 1221)

FEATURES

- Australian & New Zealand Standard AS/NZS 1221, certified by Global-Mark PLY Ltd.
- The fire hose reels are capable of rotating in one plane (fixed type) or rotating in more than one plane with mounting on one of the following: swinging arm, swinging pipe or swinging door in manual and automatic version.
- The automatic fire hose reels will open fully within 3 revolution of the reel.
- The nozzle has SHUT, JET and SPRAY control settings.
- The minimum flow rate of hose reels in JET and SPRAY setting at 220 kpa pressure; for 13mm nozzle is 0.24 L/S, for 19mm nozzle is 0.45 L/S and for 25mm nozzle is 0.55 L/S.
- The effective throw range of discharge at 0.2 MPa (2 bar) pressure is 10 mtrs. in JET setting.
- The reel discs are painted RED with printed user instructions.

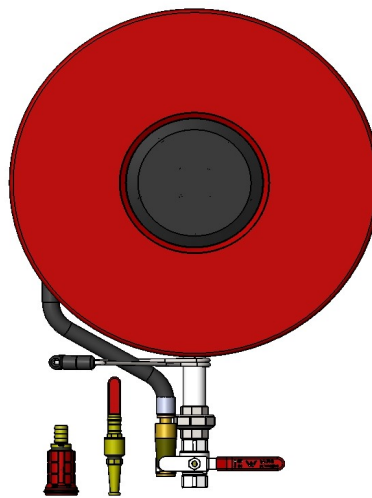

SPECIFICATION

Type	Model No.	Hose Diameter & Length
36m Cabinet Mounted	SD HA19-020	Length:36m, Diameter: 19mm, Nozzle: Metal rotary nozzle
36m fixed type	SD HA19-040M	Length:36m, Diameter: 19mm, Nozzle: Metal rotary nozzle
36m fixed type	SD HA19-040L	Length:36m, Diameter: 19mm, Nozzle: lever nozzle
36m fixed type	SD HA19-040P	Length:36m, Diameter: 19mm, Nozzle: plastic rotary nozzle
36m fixed type	SD HA19-050P	Length:36m, Diameter: 19mm, Nozzle: plastic rotary nozzle
36m fixed type	SD HA19-050L	Length:36m, Diameter: 19mm, Nozzle: lever nozzle
36m fixed type	SD HA19-050M	Length:36m, Diameter: 19mm, Nozzle: Metal rotary nozzle
36m fixed type	SD HA19-060L	Length:36m, Diameter: 19mm, Nozzle: lever nozzle
36m fixed type	SD HA19-060M	Length:36m, Diameter: 19mm, Nozzle: Metal rotary nozzle
36m fixed type	SD HA19-060P	Length:36m, Diameter: 19mm, Nozzle: plastic rotary nozzle
36m wall mounted	SD HA19-030L	Length:36m, Diameter: 19mm, Nozzle: lever nozzle
36m wall mounted	SD HA19-030M	Length:36m, Diameter: 19mm, Nozzle: Metal rotary nozzle
36m wall mounted	SD HA19-030P	Length:36m, Diameter: 19mm, Nozzle: Plastic rotary nozzle