

PRESSURE RELIEF VALVE

Model: SD-RV20CA

APPLICATION

SD-RV20CA Pressure Relief Valves are spring operated lead free brass relief valves designed to be used only as protection from the build up of excessive pressure in systems containing water, oil or air. These valves are not ASME approved safety relief valves and should not be used in system applications with this requirement. They feature a lead free brass construction with stainless steel springs. Ideally suited as a bypass thermal expansion relief valve, the SD-RV20CA valves incorporate a calibrated adjustment feature for setting the valve to the relief pressure required.

FEATURES

- Material is Brass
- Stainless Steel Springs
- Calibrated Adjustment feature
- Protect against buildup of excessive pressure
- For use in system containing water, oil and air



MATERIAL


SL No	Part	Material
1	Body	Brass
2	Cap	Brass
3	Spring pad	Brass
4	Spring	Stainless Steel
5	Spacer	Brass
6	O Ring	NBR
7	Retaining Ring	Brass
8	Core	Brass
9	Gasket	NBR

PRESSURE

Size	Pressure Range
3/4"	100 - 300 Psi (6.9 - 20.6 Bar)

DIMENSION

Size	Height	Width	Weight
3/4"	81 mm	41 mm	0.190 gms

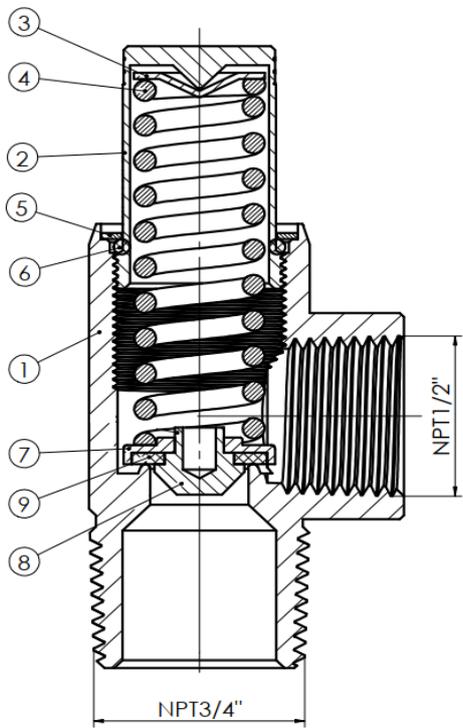

SHIELD FIRE, SAFETY & SECURITY LTD

Unit 3, Endeavour Drive, Basildon-Essex, SS14 3WF, United Kingdom
 Tel: +44 1708 377731 Fax: +44 1708 347637, E-mail: info@shieldglobal.com
 www.shieldglobal.com